


30 mm x 62 mm x 20 mm skf 22206 e bearing

Bearing No. 22206 e

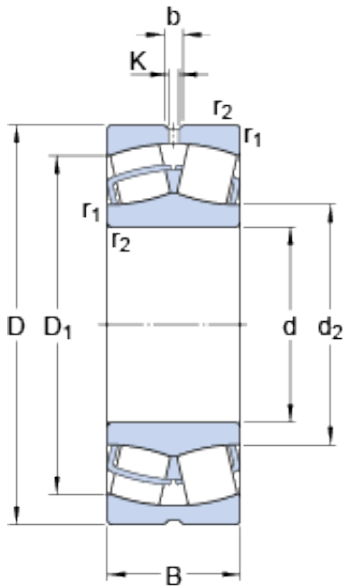

22206 e Bearing 2D drawings and 3D CAD models

| | |
|---|-------------|
| Size | 62x30x20 mm |
| Bore Diameter | 62 mm |
| Outer Diameter | 30 mm |
| Width | 20 mm |
| d | 30 mm |
| D | 62 mm |
| B | 20 mm |
| d ₂ | 37.6 mm |
| D ₁ | 53 mm |
| b | 3.7 mm |
| K | 2 mm |
| r _{1,2} - min. | 1 mm |
| d _a - min. | 35.6 mm |
| D _a - max. | 56.4 mm |
| r _a - max. | 1 mm |
| Basic dynamic load rating - C | 66.1 kN |
| Basic static load rating - C ₀ | 58.5 kN |
| Fatigue load limit - P _u | 6.4 kN |
| Reference speed | 10000 r/min |
| Limiting speed | 14000 r/min |
| Calculation factor - e | 0.31 |
| Calculation factor - Y ₁ | 2.2 |
| Calculation factor - Y ₂ | 3.3 |
| Calculation factor - Y ₀ | 2.2 |
| | |



PRECISION BEARING CORP.

| | |
|---------------------------|--|
| Category | Spherical Roller Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.29 |
| EAN | 7316572093566 |
| Product Group | B04311 |
| Internal Clearance | C0-Medium |
| Mounting Method | Shaft Mount |
| Rolling Element | Spherical Roller Bearing |
| Bore Profile | Straight |
| Cage Material | Steel |
| Enclosure | Open |
| Number of Rows of Rollers | Double Row |
| Relubricatable | Yes |
| Withdrawal Sleeve | Not Applicable |
| Withdrawal Nut | Not Applicable |
| Inch - Metric | Metric |
| Long Description | 30MM Straight Bore; 62MM Outside Diameter; 20MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable |
| Category | Spherical Roller Bearing |
| UNSPSC | 31171510 |
| Harmonized Tariff Code | 84823080 |
| Noun | Bearing |
| Keyword String | Spherical |
| Manufacturer URL | http://www.skf.com |
| Weight / LBS | 0.639 |
| Outside Diameter | 2.441 Inch 62 Millimeter |
| | |



PRECISION BEARING CORP.

| | |
|--------------------------------|---|
| Adapter Part Number | Not Applicable Inch Not Applicable Millimeter |
| Bore | 1.181 Inch 30 Millimeter |
| Width | 0.787 Inch 20 Millimeter |
| bore diameter: | 30 mm |
| maximum rpm: | 14000 RPM |
| outside diameter: | 62 mm |
| operating temperature range: | Maximum of +390 ° F |
| overall width: | 20 mm |
| cage material: | Steel |
| bore type: | Straight |
| bearing material: | Steel |
| outer ring type: | Not Split |
| cage type: | Inner Ring Guided |
| internal clearance: | C0 |
| precision rating: | Not Rated |
| closure type: | Open |
| finish/coating: | Uncoated |
| lubrication hole type: | Lubrication Groove & Hole |
| outer ring width: | 20 mm |
| dynamic load capacity: | 64 kN |
| fillet radius: | 1 mm |
| static load capacity: | 60 kN |
| series: | 222 |
| d_2 | 37.6 mm |
| D_1 | 53 mm |
| $r_{1,2}$ min. | 1 mm |
| d_a min. | 35.6 mm |
| D_a max. | 56.4 mm |
| r_a max. | 1 mm |
| Basic dynamic load rating C | 66.1 kN |
| Basic static load rating C_0 | 60 kN |



PRECISION BEARING CORP.

| | |
|--------------------------|---------|
| Fatigue load limit P_u | 6.4 kN |
| Calculation factor e | 0.31 |
| Calculation factor Y_1 | 2.2 |
| Calculation factor Y_2 | 3.3 |
| Calculation factor Y_0 | 2.2 |
| Mass bearing | 0.29 kg |